


108FR

FR Double-Coated Cloth Tape

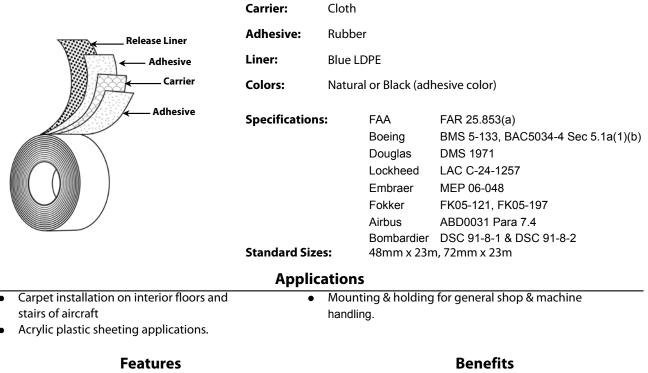

h reinforcement	٠	Good strength and elongation for easy
		tear, application and removal
	٠	Conformable and moisture resistant
e retardant rubber-based adhesive	٠	Clean removal from most surfaces
	•	Aggressive bond for secure hold
	٠	Repositionable adhesive for easy installation
	h reinforcement ne retardant rubber-based adhesive	e retardant rubber-based adhesive •

Physical Properties Standard UOM Metric UOM **Test Method Total Thickness** 15 mils 381 mic ASTM D-1000 Adhesion to Steel (air) 60 oz/in 6.57 N/cm PSTC-101 **Tensile Strength** 55 lb/in 96.32 N/cm ASTM D-1000 472.9 g/m² ASTM D-1000 Weight 13 oz/sq yd **Operating Temperature** 40 to 200 °F 4 to 93 °C **Exiting Time** 1.5 sec FAR 25.853(a) **Burn Length** 4.5" FAR 25.853(a) FAR 25.853(a) **Drip Exiting** N/A

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038 1-800-343-7875 Fax 1-800-328-4822 www.berryplastics.com Nijverheidsstraat 10 2260 Oevel (Westerlo) Belgium 32-014-722500 Fax 32-014-722570 5/23/14